

### TECHNICAL DATA

## T5 - 5" TOUCH SCREEN




#### 5" CAN Bus SCREEN

The T5 has a slim-line profile housing a hi-resolution 5-inch projected capacitive customisable colour screen delivering modern tablet like aesthetics.

The WVGA (800x480) PCAP LCD colour display can be viewed in full sunlight and the ruggedised unit is sealed to meet IP67 standards. With dual CAN, Ethernet and Video supported screen the T5 is suited to a wide range of applications. External buttons can be added via compatible CAN keypad.


It meets the need for tough, flexible instrumentation while offering high performance and design specifications. Custom software applications are rapidly created using the software development kit (SDK), and the screen can be integrated into a control and monitoring system using its data logging capacity and alarm functionality.

#### **DIMENSIONS**

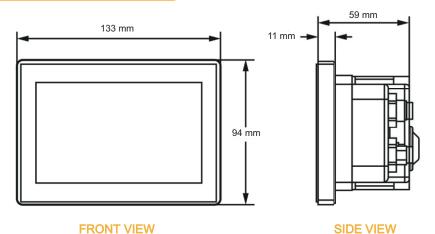

# 118 mm

**REAR VIEW** 

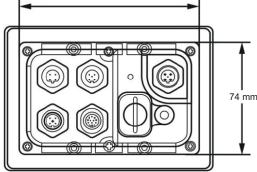

SIDE VIEW

### **SPECIFICATIONS**

Hardware	
CPU	i.MX6 Solo X
FLASH Memory	512MB SLC NAND
SDRAM	256MB DDR3

Display PCAP LCD 5.0"  Resolution 800 (H) x 480 (V) WVGA  Active Area 108.0mm (H) x 64.8mm (V)  Viewing Angle 70 degrees left/right/down/up  Contrast Ratio 700:1  Brightness 800 NIT (cd/m²) Full sunlight readable  Power Requirements 8V to 32V DC  Sounder Internal Buzzer  Connection 5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded  E - not in use			
Resolution 800 (H) x 480 (V) WVGA  Active Area 108.0mm (H) x 64.8mm (V)  Viewing Angle 70 degrees left/right/down/up  Contrast Ratio 700:1  Brightness 800 NIT (cd/m²) Full sunlight readable  Power Requirements 8V to 32V DC  Sounder Internal Buzzer  Connection 5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Electrical		
Active Area 108.0mm (H) x 64.8mm (V)  Viewing Angle 70 degrees left/right/down/up  Contrast Ratio 700:1  Brightness 800 NIT (cd/m²) Full sunlight readable  Power Requirements 8V to 32V DC  Sounder Internal Buzzer  Connection 5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Display	PCAP LCD 5.0"	
Viewing Angle 70 degrees left/right/down/up Contrast Ratio 700:1  Brightness 800 NIT (cd/m²) Full sunlight readable Power Requirements 8V to 32V DC  Sounder Internal Buzzer Connection 5 x M12 Connectors A - Primary CANbus / Power M12 Male 5 pin A coded B - Isolated CANbus M12 Male 5 pin A coded C - Ethernet M12 Female 4 pin D coded D - Misc M12 Female 12 pin A coded	Resolution	800 (H) x 480 (V) WVGA	
Contrast Ratio 700:1  Brightness 800 NIT (cd/m²) Full sunlight readable  Power Requirements 8V to 32V DC  Sounder Internal Buzzer  Connection 5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Active Area	108.0mm (H) x 64.8mm (V)	
Brightness 800 NIT (cd/m²) Full sunlight readable  Power Requirements 8V to 32V DC  Sounder Internal Buzzer  Connection 5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Viewing Angle	70 degrees left/right/down/up	
Power Requirements 8V to 32V DC  Sounder Internal Buzzer  Connection 5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Contrast Ratio 700:1		
Sounder  Internal Buzzer  Connection  5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Brightness 800 NIT (cd/m <sup>2</sup> ) Full sunlight readable		
Connection  5 x M12 Connectors  A - Primary CANbus / Power  M12 Male 5 pin A coded  B - Isolated CANbus  M12 Male 5 pin A coded  C - Ethernet  M12 Female 4 pin D coded  D - Misc  M12 Female 12 pin A coded	Power Requirements	8V to 32V DC	
A - Primary CANbus / Power M12 Male 5 pin A coded B - Isolated CANbus M12 Male 5 pin A coded C - Ethernet M12 Female 4 pin D coded D - Misc M12 Female 12 pin A coded	Sounder	Internal Buzzer	
M12 Male 5 pin A coded  B - Isolated CANbus M12 Male 5 pin A coded  C - Ethernet M12 Female 4 pin D coded  D - Misc M12 Female 12 pin A coded	Connection	5 x M12 Connectors	
B - Isolated CANbus M12 Male 5 pin A coded C - Ethernet M12 Female 4 pin D coded D - Misc M12 Female 12 pin A coded		A - Primary CANbus / Power	
M12 Male 5 pin A coded  C - Ethernet M12 Female 4 pin D coded  D - Misc M12 Female 12 pin A coded		M12 Male 5 pin A coded	
C - Ethernet M12 Female 4 pin D coded D - Misc M12 Female 12 pin A coded		B - Isolated CANbus	
M12 Female 4 pin D coded D - Misc M12 Female 12 pin A coded		M12 Male 5 pin A coded	
D - Misc M12 Female 12 pin A coded		C - Ethernet	
M12 Female 12 pin A coded		M12 Female 4 pin D coded	
·		D - Misc	
E- not in use		M12 Female 12 pin A coded	
		E- not in use	

Mechanical	
Case material	ABS
Case colour Anthracite Grey	
Dimensions 133mm (W) x 94mm (H) x 11mm forward & 48mm re	

Input/Output / Communications		
Analogue Input	Software selectable as 0 - 2.5 VDC, 0 - 10 VDC or 0 - 10 VDC or 0 - 1000 OHMS	
Switch Inputs	Switch Contact to ground or open collector type sensor - max. frequency = 50 Hz	
Relay Output	Open collector suitable 0.5A continuous load.	
Communications $ \begin{array}{c} 1 \text{ x RS422/485, 2 x CAN Bus 2.0B} \\ (1 \text{ isolated}) \\ 1 \text{ x USB 2.0, 1 x Ethernet} \end{array} $		
Environmental		

Environmental		
Operating temperature	-20°C to +70°C	
Storage Temperature	-30°C to +80°C	
Degree of Protection	IP67	

#### CONNECTIONS

CAN1	- -	
1	No Connection	
2	Positive DC Supply	
3	Ground	(2) (5) (1)
4	CAN Data H	(3) (4)
5	CAN Data L	

CAN2		
1	No Connection	
2	Isolated Volts Positive	
3	Isolated Volts Negative	
4	Isolated CAN Data H	(3) (4)
5	Isolated CAN Data L	

Video	o - unused	
1	Unused	
2	Unused	
3	Unused	5 2
4	Unused	(4) (3)
5	Unused	

xter	nal USB IO	
1	USB Volts Positive	
2	USB Data Negative (DM)	(1) $(2)$
3	USB Data Positive (DP)	(9) $(10)$ $(3)$
4	No Connection	(8) (2) (4)
5	USB Volts Negative	065
6	RS422/485 Tx+*	
7	RS422/485 Tx-*	
8	RS422/485 Rx+*	
9	RS422/485 Rx-*	
10	Digital Input	
11	Analogue Input	*RS422 and RS485 options
12	Relay Output	configured as a build option

Ether	rnet	
1	White/Orange +TK	
2	White/Green +RX	
3	Orange - TX	
4	Green	(4) (3)

